

'Quad Cruise' Electronic Cruise & Spray Control for **Yamaha YFM400FWA Kodiak to 2001** **For bikes without brake lights, with a rear disc brake**



NOTE: - This cruise kit uses a speed sensor on the rear axle disc brake. Check that the rear disc brake is suitable for use as a speed sensor tone wheel by performing the following checks. Place a magnet on the disc surface and count the number of slots in the disc. The magnet MUST stick to the disc and there MUST be 12 slots in the disc for the cruise control to work. Contact us for alternate speed sensing arrangements if the brake disc is not suitable.

Quad Cruise is a new version of the MotorCycle Setup cruise control that is designed to operate at speeds from 4 km/h. It has also been designed to provide power to any crop spray system fitted to the bike - either manually, or only when the cruise control is engaged, via a 10 amp power outlet that is incorporated into the wiring loom. This means that spray operation occurs only when the bike's speed is held at the appropriate set speed on the cruise control.

The cruise control can be set to a specific speed to spray a row by pressing the SET button, turned off at the end of the row with either front or rear brake operation. The RES button can be used to set the bike's speed back to the previous speed. The spray system will turn on and off with the cruise control, when the spray switch is in the AUTO position.

Every effort has been made to make the cruise control waterproof. The new computer is fully sealed, as is the electric actuator. Wherever possible sealed connectors have been used on the wiring harness.


The following provides a brief description of the power consumption and component locations of the MotorCycle Setup electronic speed and spray control.

Current draw while the cruise control is switched on, but not engaged, is approximately 0.020 amp (0.28 watts). Current draw while the cruise control is engaged is nominally 0.5 amp (6 Watts) with peak draw at 2 amp (24 Watts). By comparison, a head light bulb typically draws about 4 amps (55 Watts), and a tail light bulb (running light) draws about 0.4 amp (5 Watts).

Installed weight of the cruise control is approximately 3kg.

Refer to the line drawing on the back of this sheet to identify the component numbers in the text.


The **Computer (1)** and **Electric Actuator or throttle servo (2)** are mounted inside the rear storage compartment. An **Actuator cable (3)** connects the actuator to the **CIU** (see below).

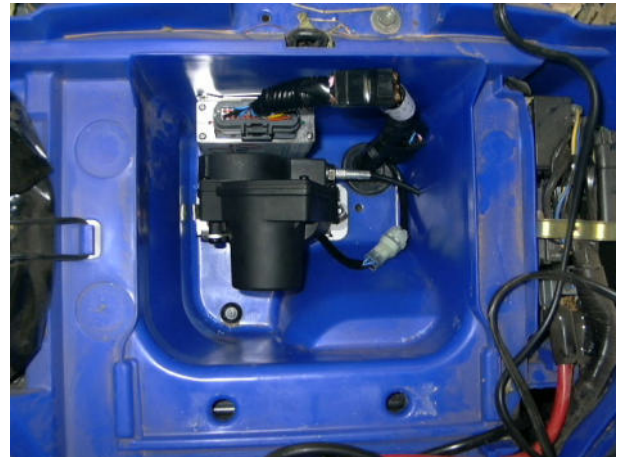

The **'Cable Interface Unit' (CIU) (4)** is located beside the carburettor under the fuel tank and is mounted on the right side frame tube. A new **cable (5)** is provided to connect the CIU to the carburettor. The existing throttle cable is disconnected from the carburettor and is reconnected to the CIU. A cable from the actuator is also connected to the CIU.



The **Control Switch (6)** is mounted to the left hand brake lever handlebar clamp and is located above the left hand switch block. The bracket mounts between the faces of the lever mounting clamp.

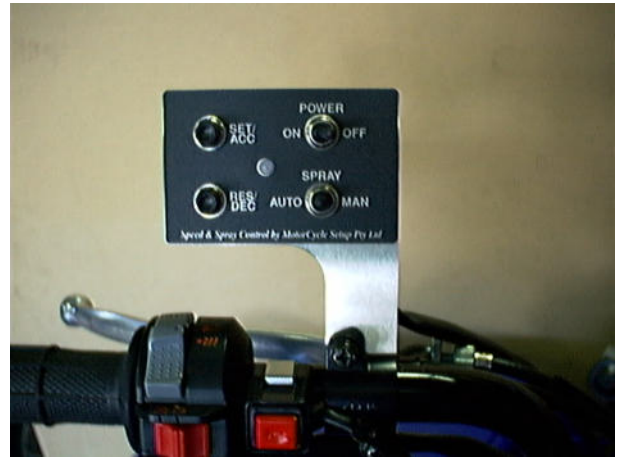

A **Speed Sensor (7)** is mounted on the rear axle disc brake to provide ground speed sensing.



The **Wiring Loom (8)** is dedicated to the bike. Brake sensing is sourced from the **brake light switch (9)** supplied in the kit. This switch is operated by the rear brake hand lever and brake pedal. Power for the speed control is sourced from a connector on the bike's accessory circuit. Neutral gear sensing is sourced from the bikes' neutral light switch. Earth (ground) is sourced from the battery negative terminal. Power for the spray system is sourced from the battery positive terminal and a two pin plug is provided at the rear of the motorcycle for connection to the spray. Matching plug and terminals are provided in the kit for connection to the spray unit.

Parts drawing over page.

MotorCycle Cruise Controls

AUSTRALIA

Web Site:

<http://www.mccruise.com>

International:


Phone (International Access Code) 61 3 9808 2804

Australia:

Phone (03) 9808 2804

E-mail:

sales@mccruise.com

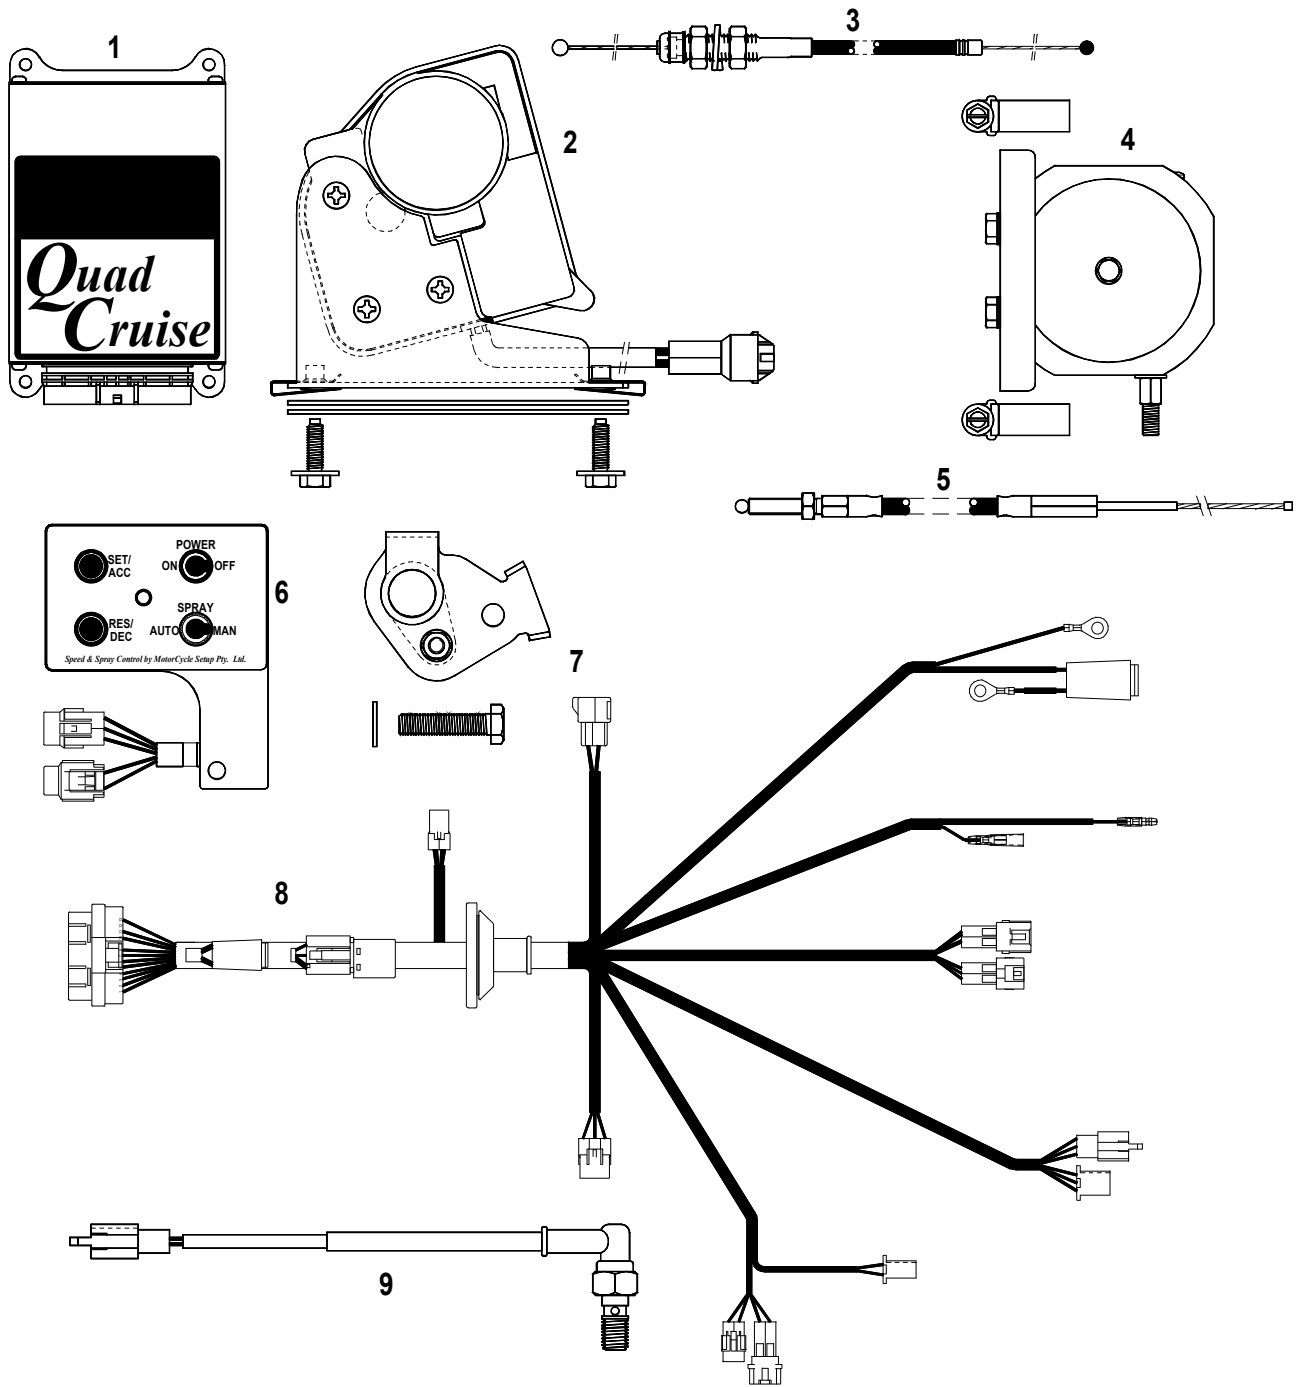

MotorCycle Cruise Controls

AUSTRALIA

Web Site:

<http://www.mccruise.com>

International:

Phone (International Access Code) 61 3 9808 2804

Australia:

Phone (03) 9808 2804

E-mail:

sales@mccruise.com